



VISION X TEST REPORT

Test Standard : CISPR 25 Edition 3.0 (2008-03)
Test Item : BHB07940

CISPR 25 EDITION 3.0 (2008-03) TESTS OF BHB SERIES

Report No. CP-20160624-3
Test Period 24 June 2016
Client LUCENT ENGINEERING

Contract person Mr. David Koh or Ms. Soo Ryou
E-mail : info@visionxasia.com

Test Specimen One unit manufactured on 8 June 2016
Designation : BHB07940
Type : BHB SERIES
Serial No# N/A (from Pre Production Lot)

Test Condition Temp / Humid / Pressure : +22~23 °C / 34%RH / 86-103kPa
Operating Mode : Lighting mode
Power supply : DC 24V (Car battery / Model NO. CMF100L)
Conducted Emissions

Definition

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output/Telecommunication ports.

Test Report Test Method : CISPR 25 Edition 3.0 (2008-03) CLASS 3
Measurement Frequency range : 150 kHz ~ 108 MHz
Test Mode : Lighting mode

Result : Complies

Measurement Data

-Refer to the next Page (Maximum emission configuration)

A sample calculation


COR. F (correction factor)= LISN insertion loss + Cable loss

Emission Level = meter reading + COR.F

Test Personnel Vision X Asia
Engineer Manwook Han


Date 24 June 2016

Authorized
Signature



President / Vision X Asia

Documentation

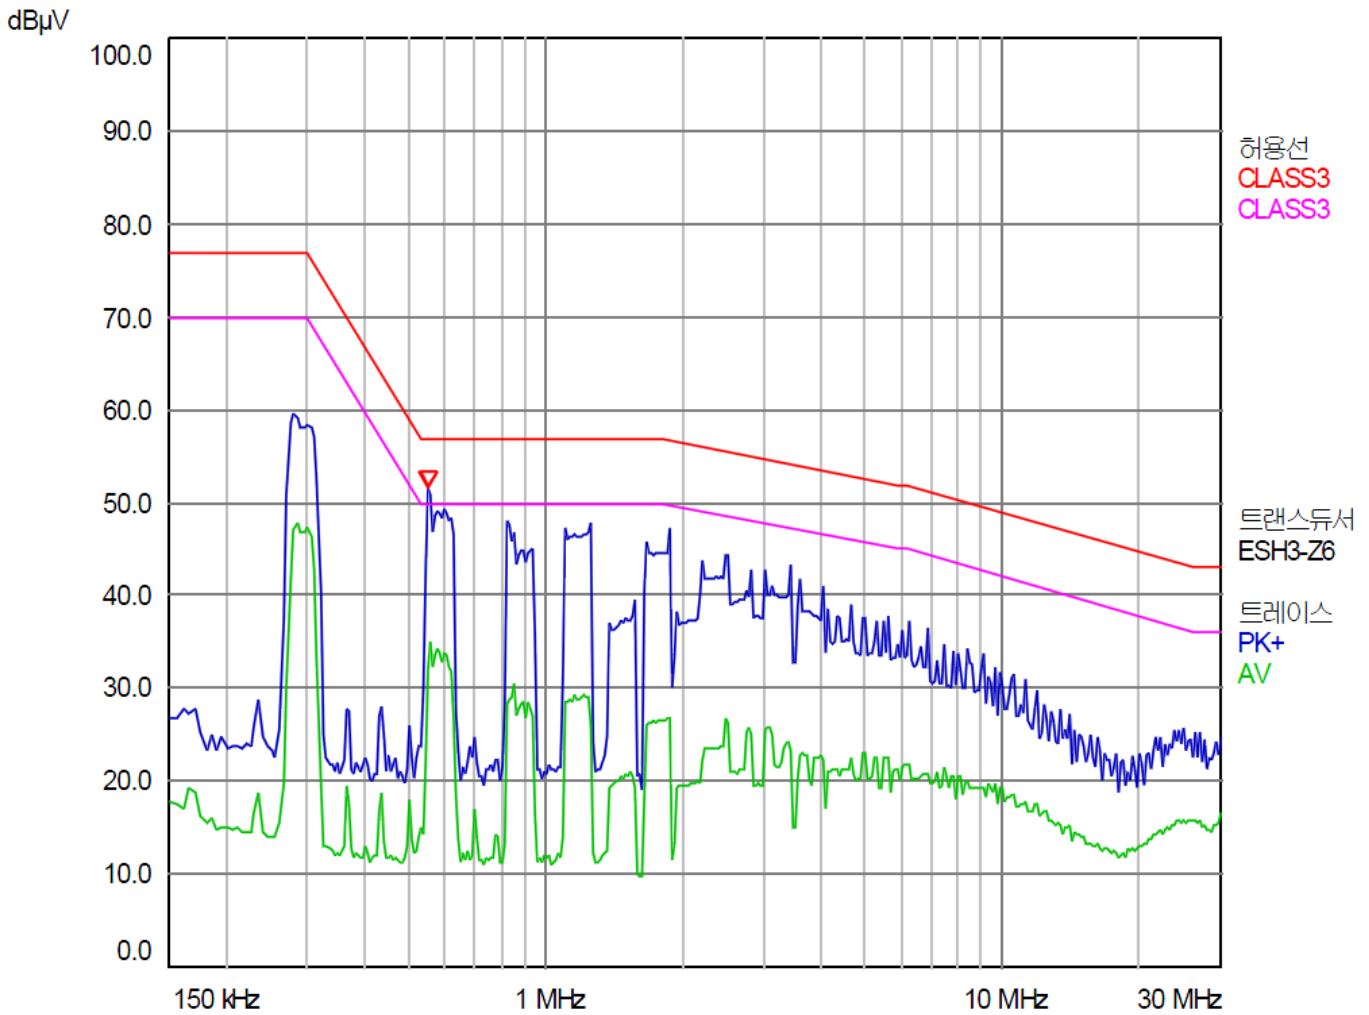

Documentation



Test Specimen



Test Facility

VISION X ASIA CO., LTD